



## CNP03

## RECESS CANOPY

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE


OPTION

### SPECIFICATION

**DIE FORGE ALUMINUM HOUSING POWDER COAT WHITE WHITE TRIM FLANGE AND DOOR**  
**POLYCARBONATE LENS**  
**INGRESS PROTECTION FOR EXPOSE FACE IP65**  
**POWER CONSUMPTION 40W**  
**BEAM ANGLE 120°**  
**INPUT VOLTAGE 120/277V 60HZ**  
**POWER FACTOR >0.95**  
**CRI: 80**  
**CCT: 30000K OR 40000K**  
**L70: 50,000 HRS**  
**LUMEN OUTPUT: 130LM/W**  
**WORKING TEMPERATURE -25°C ~ +50°C**  
**5 YEAR WARRANTY**

### MODEL

| Item Code         | Lumens | Voltage |
|-------------------|--------|---------|
| CNP03-40W-XXK-120 | 5200   | 120V    |

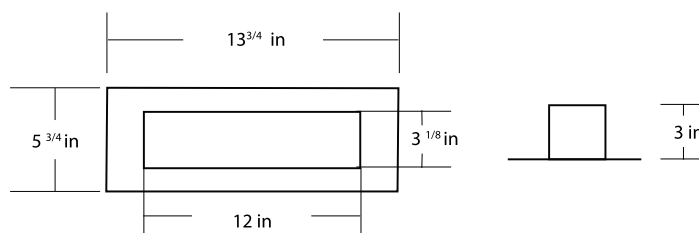

### FEATURES

#### CONSTRUCTION

- Aluminium die forge housing Aluminium door with silicone gasket Polycarbonate lens
- IP65 door construction
- IP40 Bach housing
- Side mounted adjustable support to adapt ceiling thickness

#### ELECTRICAL

- Input voltage 120/277V 60Hz 40 power input
- Power factor <0.95

#### MOUNTING

- Recess in cover ceiling only Side mount adjustable support to adapt to ceiling thickness

#### COMPLIANCE

- ULc RoHS FCC
- Wet location, cover ceiling listed