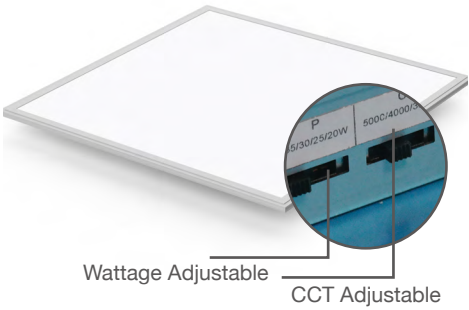


 Wattage Adjustable CCT Adjustable	PLA		WATT & CCT ADJUSTABLE LED PANEL		
	PROJECT :				
	NOTE :				
	COMPANY NAME:				
TYPE:			DATE:		
CATALOG NUMBER:					
ITEM CODE	WATT	CCT	MOUNTING	VOLTAGE	ACCESSORIES

SPECIFICATION

ALUMINIUM EXTRUDED HOUSING

MATERIAL AL+LPG+PS

CCT ADJUSTABLE FROM 3000K - 3500K - 4000K - 5000K

WATT ADJUSTABLE: 30W-35W-40W-45W; 35W-40W-45W-50W; 50W-60W-65W-72W

NO NEED ANY WIRE CONNECTIONS

CRI:>80

BEAM ANGLE 120° LAMBERTIAN

POWER EFFICIENCY: > 90%

WORKING TEMPERATURE -20°C TO +45°C


L80-50,000HRS

IP GRADE: IP40

0-10V DIMMABLE

DRY OR DAMP LOCATION

5 YEAR WARRANTY

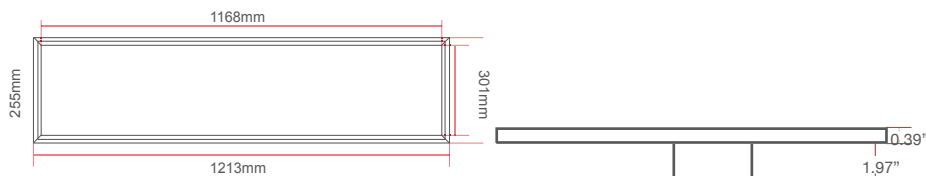

301mm * 1213mm (1 * 4 ft)

PRODUCT	DIMENSION (INCH)
1'X4'	47.74"X11.81"
2'X2'	23.74"X23.74"
2'X4'	47.74"X23.74"

FEATURES

CONSTRUCTION

- Extruded aluminium housing for more strength PMMA lens
- Earthquake clip standard
- IP44, damp location
- Powder coat white paint

MOUNTING

- Recess inverted T-BAR
- Drywall kit optional
- Surface kit optional
- Pendant kit optional

ELECTRICAL

- 120/277V
- 0-10V dimming standard
- PF> 0.95
- THD ≤ 15 %
- Ambient: -20°C~+45°C
- LED driver type class II
- CCT adjustable
- Wattage adjustable

COMPLIANCE

- ULc
- DLC
- ICES-005
- 5 Year Warranty
- IEC 60929 Annex E



MODELS

Item Code	Watts(W)	CCT	Voltage
PLA-S1-45W-120	30-35-40-45	3000K/3500K/4000K/5000K	120-277 V or 347V
PLA-S2-45W-120	30-35-40-45	3000K/3500K/4000K/5000K	
PLA-S3-50W-120	35-40-45-50	3000K/3500K/4000K/5000K	
PLA-S3-72W-120	50-60-65-72	3000K/3500K/4000K/5000K	

ACCESSORIES

Code Order	Description	Type	Description
10045 10045 10046	1X4 2X2 2X4	hang kits	4 strength steel wire 1/32 Ø 42" long. End 4 anchorage for direct ceiling mount (No canopy or feed cable)
10047 10048 10049	1X4 2X2 2X4	surface mount kit	Painted White

OPTIONS (MUST BE SPECIFIED)

CODE	MOUNTING
MR	Recess inverted T-BAR
MD	Drywall kit optional
MS	Surface kit optional
MP	Pendant kit optional

PACKAGE

Size (ft)	Net Weight(ibs)	Packing Detail
1X4	6.6	4PC/ CTN,39.7KG/CTN, 50.39X9.05X15.25 Inch
2X2	6.6	4PC/ CTN, 39.7KG/CTN, 27.56X9.84X27.56 Inch
2X4	15.4	4PC/ CTN, 297.6KG/CTN, 50.39X9.84X27.56 Inch