



WP1

SLIM WALL PACK

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT

BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

WALL MOUNT TILT ADJUSTABLE LUMINAIRE

DIE CAST HOUSING

TEMPERED GLASS LENS

WATTAGE 30W & 50W

CCT: 4000K OR 5000K

CRI: 80 RA

LUMENS OUTPUT: > 120LM/W

WORKING LIFE-SPAN L70-50 000 HRS

INPUT VOLTAGE 120/277 VAC OR 347 VAC 60HZ

IP RATING IP65

IMPACT RATIONG IK08

WORKING TEMPERATURE : -20°C TO + 50°C

IES TYPE III

COLOR BRONZE STANDARD BLACK OR WHITE OPTIONAL

BUTTON TYPE PHOTOCELL 120/277 ONLY OPTIONAL

5 YEAR WARRANTY

FEATURES

CONSTRUCTION

- High pressure die cast housing
- Powder coat bronze, black or white
- Tempered glass lens
- Ingress protection IP65
- Impact rating IK08
- Standard top opening 1/2" threaded
- Optional Photocell
- Input voltage 120/277 VAC or 347 VAC
- IP65 ingress protection
- Silicone rubber seal gasket

ELECTRICAL

- Input voltage 120/277 VAC or 347 VAC 60Hz
- PF: > 0.95
- THD: < 12%
- Optional Photocell
- Surge protector 10KA, 4KV line-line

MOUNTING

- Standard mount on junction box (by others)
- Recessed in wall
- Optional cable reed from surface
- Junction box(by others) need cor option, If used, no photocell option

COMPLIANCE

- ULc
- DLC
- ROHS




MODELS

Item Code	Watts(W)	Lumens (LM)	CCT	Voltage
WP1-30W-XXK-XXXV	30	3750	4000K / 5000K	120-277 V OR 347V
WP1-50W-XXK-XXXV	50	6250	4000K / 5000K	

DIMENSION

Watts (W)	Size (H*L*W) (Inch)
30	8.1 X 6.7 X 4.1
50	11.6 X 9.4 X 6.7

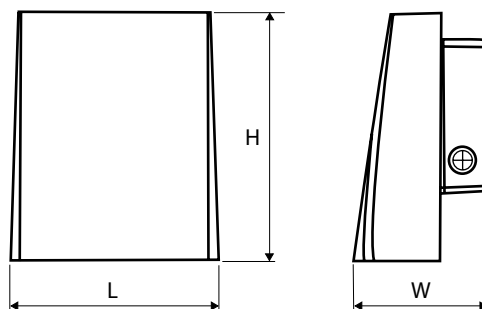

OPTIONS (MUST BE SPECIFIED)

OPTION	
PE	Photocell button type
COR	Cable top mounting 3/18 AWG