



WP3

SQUARE WALL PACK

PROJECT :

NOTE :

COMPANY NAME:

TYPE:

DATE:

CATALOG NUMBER:

ITEM CODE

WATT

CCT


BEAM ANGLE

VOLTAGE

OPTION

SPECIFICATION

DIE CAST ALUMINIUM BLACK PLATE
POWDER COAT PAINT FINISH BLACK OR BRONZE
POLYCARBONATE LENS
IP65 CONSTRUCTION
WATTAGE 15W
CCT: 4000K
OPERATING TEMPERATURE -40°C TO +40°C
CRI 80 RA
LUMEN OUTPUT: >130LM/W
WORKING LIFE SPAN L70-50 000HRS
INPUT VOLTAGE 120/277 VAC
PHOTO CONTROL OPTIONAL
5 YEAR WARRANTY

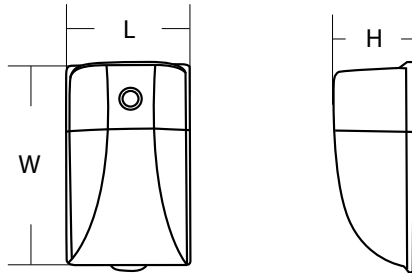

FEATURES

CONSTRUCTION

- Die cast aluminium black plate
- Powder coat paint finish
- Standard color bronze, black optional
- Polycarbonate lens
- IP65
- Threaded entry at the bottom of the mounting plate

ELECTRICAL

- Input voltage 120/277 VAC 60HZ
- Photo control optional

MOUNTING

- Junction box direct wall mount

COMPLIANCE

- ULc
- DLC
- ROHS

Item Code	Watts (W)	Lumens (LM)	CCT	Dimension (L*W*H)(Inch)	Voltage
WP3-15W-40K-120V	15	1950	4000K	11.0X6.8X5.4	120-277 V

